



STONE[®] 2 Video Multiplexer

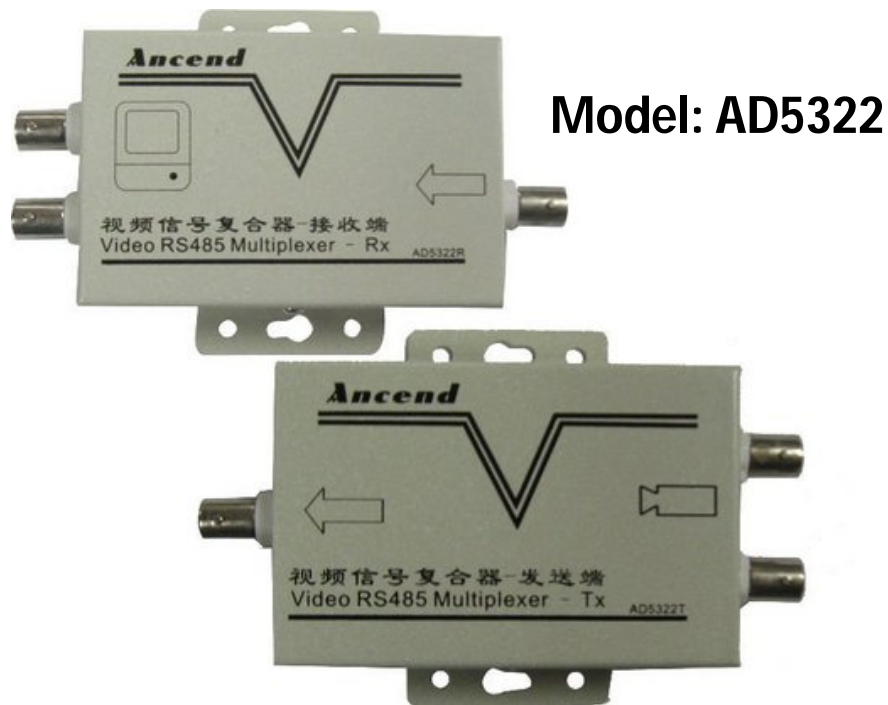

Product Size

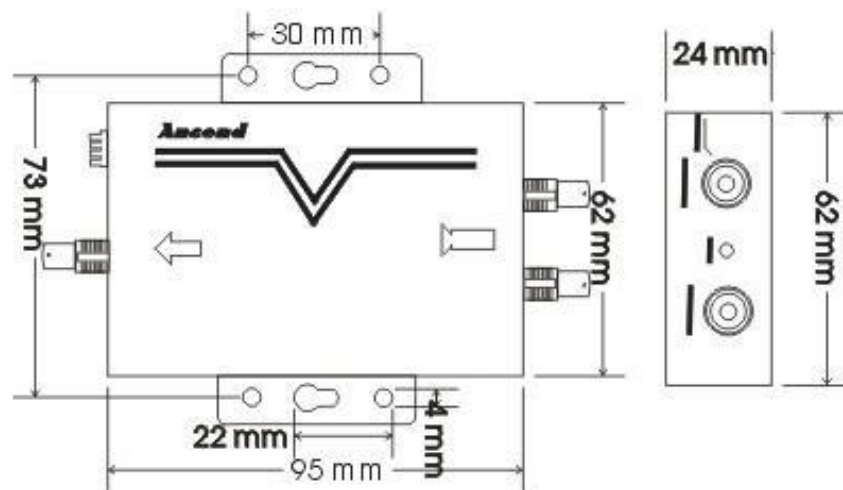

Product Features

Two different signals were transmitted through a coaxial cable by setting.

Method 1. Video signal and control signal (RS485) two way transmit.

Method 2. Two paths signals same way transmit.

AD5322 multiplexer is suitable for 75Ω multi-type coaxial cable such as video cable, RF cable etc. The equipment will reach a longer distance if the RF cable (SYWV75) was used to transmit signal.

Parameters

Video Input: 1.0Vp-p; BNC inter (75Ω unbalance)

Control Output: RS485 transparent output transmitting end (core: A, skin: B) BNC interface, receiving end (core: B, skin: A)

Cable Output (RF): ≥ 106 dBuV BNC interface (75Ω unbalance)

Input Power: DC12V / 300mA (inner core is anode, inner core 2.1mm, do not reverse connection)

Power Loss: ≤ 1.5 W

Work Environment: Temperature: -14°-113° F (-10°C至45°C)

Relative Humidity: $\leq 85\%$