βτοπε[®] Dual-Network Wireless Alarm System

all		Ma Syste	in Me m Set	nu Ltines	
-	ô	1	2	3	E
	ô	4	5	6	1
	٢	7	8	9 wvz	1
\sim	C	*	0	#8	4 5

GSM/PSTN B11

Dual-Network Alarm System

Double the Protection

With a built-in LCD and touch keypad, the B11 packs serious security functionality into a sleek panel with an elegant piano finish. Simply insert a regular SIM card with credit into the B11 and plug in any PSTN fixed landline, and you double the security for your home and loved ones with system redundancy.


Double the Protection

With a built-in LCD and touch keypad, the B11 packs serious security functionality into a sleek panel with an elegant piano finish. Simply insert a regular SIM card with credit into the B11 and plug in any PSTN fixed landline, and you double the security for your home and loved ones with system redundancy.

βτοηε[®] Dual-Network Wireless Alarm System


GSM/ PSTN DUAL NETWORKS ALARM SYSTEM (CG-B11)



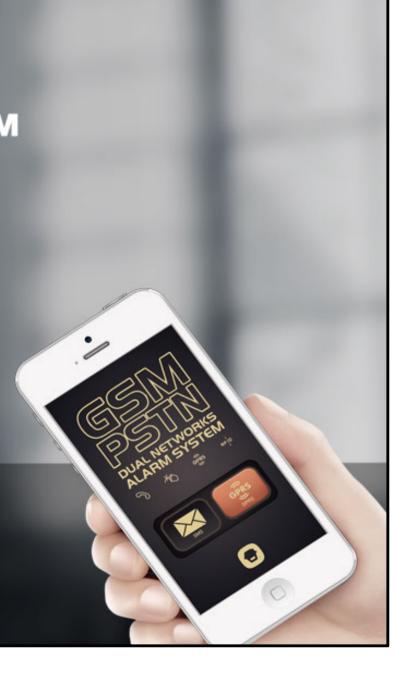

5 τοηε[®] Dual-Network Wireless Alarm System





Insert a SIM card, and you can remotely operate the alarm system with SMS text messages or smartphone app commands. Plug in any PSTN fixed landline, and you can dial in to the alarm system and follow the voice prompts for easy operation.

Power Beyond Imagination

The B11 stores up to 6 dial-in phone numbers, 6 call-out numbers, 2 CID central station numbers and 150 latest incidents. You can also record a 10-second warning message on your own.





Silent Guard

SOS

You can enter a customizable duress code to disarm the B11, while it still gets the help that you need in an emergency.



You can preset an arm and disarm schedule for your weekday routine.




You Name It

Feel free to name all the detection zones and RFID tags to your liking.



βτοπε[®] Dual-Network Wireless Alarm System

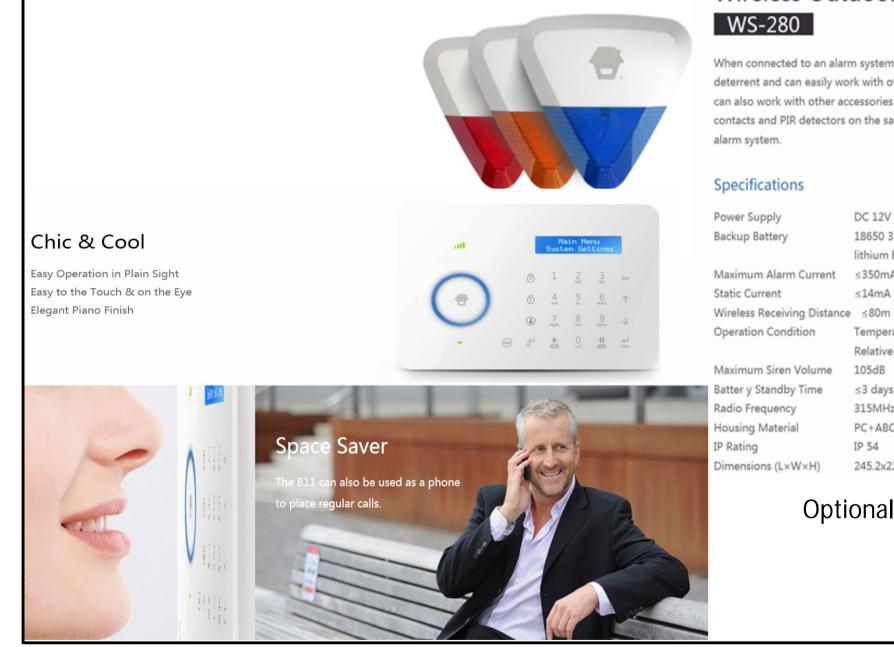

Wireless Outdoor Strobe Siren

When connected to an alarm system, the WS-280 is an effective crime deterrent and can easily work with other sirens in the same system. The unit can also work with other accessories such as remote controls, door/window contacts and PIR detectors on the same radio frequency to build an on-site alarm system.

	DC 12V 500mA
	18650 3.7V 1200mAh rechargeable
	lithium battery
n Current	≤350mA
	≤14mA
ing Distance	≤80m (in open area)
dition	Temperature: -10°C ~ +55°C
	Relative Humidity: ≤80% (Non-condensing)
Volume	105dB
y Time	≤3 days
y	315MHz or 433.92MHz (±75KHz)
al	PC+ABC+ANTI-UV
	IP 54
W×H)	245.2x227.5x72.4 mm

Optional accessories

βτοηε[®] Dual-Network Wireless Alarm System

System Items

CG-B11 Control Panel x 1 DWC-102 Wireless Door/Window Contact x 1 PIR-910 Wireless Pet-Immune PIR Motion Detector x 1 RC-80 Wireless Remote Control x2 TAG-26 RFID Tag x2



Specifications

Power Supply	
--------------	--

	Output: DC 12V 500mA, 6Wh
Standby Current	≤ 90mA
Alarm Current	≤ 300mA
Backup Battery	BL-5B 3.7V 800mAh Rechargeable lithium battery x 2 pcs
Internal Siren Volume	95dB
Radio Frequency	315MHz or 433.92MHz (±75KHz)
Maximum Stored Phone No.	6 Alarm Phone No. and 2 CMS No.
Maximum Remote Controls	10 pcs
Maximum Sensors	50 pcs
Maximum RFID Tags	50 pcs
Maximum Event Logs	150 events
Housing Material	ABS plastic
Operation Condition	Temperature: -10°C~ +55°C
	Relative Humidity: 80% (non-condensing)
Dimension (L x W x H)	185x130x27mm

Input: AC 110V-240V, 50/60Hz